



Baseline product line

ManualCallPoint (Red) Jeweller

Wireless wall-mounted button for manual fire alarm activation.




EN
54-11:2001
A1:2005



Operating principle

Pressing ManualCallPoint activates the built-in sirens of all fire detectors in the system. At the same time, an alarm is sent to users and the central monitoring station (CMS). The button can also activate intrusion sirens and automation scenarios. All the data is instantly available in Ajax apps: which device triggered, when, and where. The alarm remains active until the button is manually released using the key (included in the complete set).

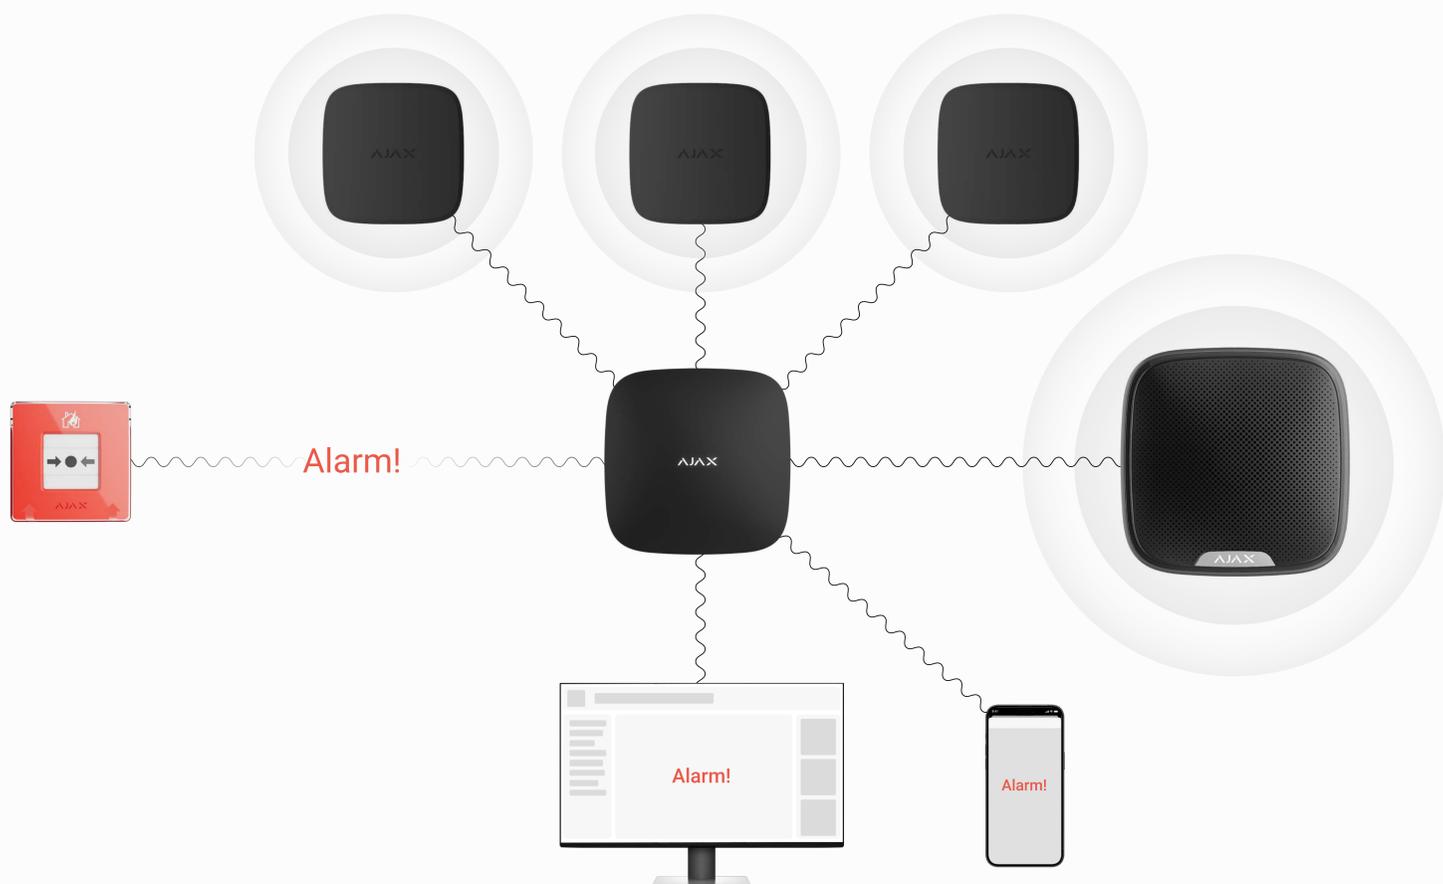

Flawless hardware

- Up to 7 years of battery life
- Simplified button mechanism to reduce the risk of failure
- Transparent front lid to prevent accidental alarm activation
- LED indication of the alarm state
- Tamper alarm



Additional features

- Automation scenarios activation
- Visual verification of alarm by MotionCam detectors or any NVR camera
- Indoor/outdoor intrusion sirens activation
- Alarm delivery to CMS

System supervision

- Regular polling of each system device to display current statuses in apps
- Automatic self-diagnosis of each device, reporting to the hub
- Up to 1,700 m of wireless communication and twice as much with a range extender
- Data encryption throughout transmission
- Instant maintenance notifications



Quick installation and setup

- The SmartBracket panel to mount the device: no need to disassemble the enclosure
- Pairing with a hub via QR code
- Remote control and configuration in the app
- A lock to secure the device on SmartBracket
- A key to reset the button after alarm

Superior, Fibra, and Baseline product lines are mutually compatible. This opens up numerous possibilities for building systems of any configuration.

<p>Compliance</p> <p>EN 54-11:2001/A1:2005</p>	<p>Compatibility</p> <p>Hubs Hub Plus, Hub 2 (2G), Hub 2 (4G), Hub 2 Plus, Hub Hybrid (2G), Hub Hybrid (4G)</p> <p>Range extenders ReX, ReX 2</p>	<p>Communication with control panel</p> <p>Jeweller communication technology</p> <p>Frequency bands 866.0–866.5 MHz 868.0–868.6 MHz 868.7–869.2 MHz 905.0–926.5 MHz 915.85–926.5 MHz 921.0–922.0 MHz Depends on the sales region</p> <p>Jeweller communication range up to 1,700 m In an open space</p>	<p>Power supply</p> <p>Battery 2 × CR123A Pre-installed</p> <p>Battery life up to 7 years</p>
<p>Installation</p> <p>Operating temperature range from 0°C to +50°C</p> <p>Operating humidity up to 80%</p>	<p>Enclosure</p> <p>Colour red</p> <p>Dimensions 102 × 104 × 39 mm</p> <p>Weight 214 g</p>	<p>Complete set</p> <p>ManualCall Point (Red) Jeweller SmartBracket mounting panel 2 × CR123A battery (pre-installed) Plastic key Transparent front lid Installation kit Quick start guide</p>	



For detailed information, scan the QR code or follow the link:
ajax.systems/support/devices/manualcallpoint-jeweller/

-  support@ajax.systems
-  @AjaxSystemsSupport_Bot
-  ajax.systems