


## DS-1271ZJ-135

Pendent Mounting Bracket for  
Dome Camera

### Features:

- Aluminum alloy material with surface spray treatment
- Waterproof design
- Cable hole on bracket makes the feature better
- Design of cap is for convenient wiring

### Dimension:

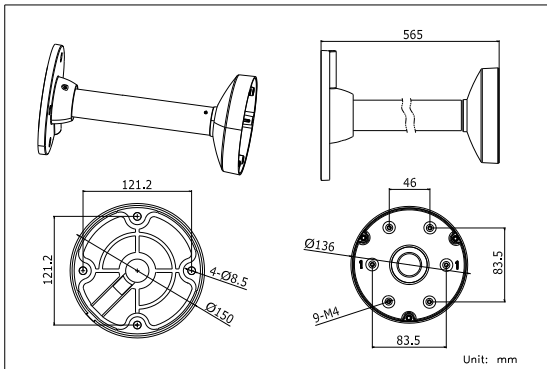


### Model Suitable:


DS-2CD2712F-I(S), DS-2CD2732F-I(S), DS-2CC52xxP(N)-VP series, DS-2CC52xxP(N)-AVPIR2 series

### Installation Step:


- ① Choose the appropriate wall to install the bracket and thread the cable




- ② Connect pole and adaptor; thread cable and screw up




- ③ Screw up and complete the fixation of adaptor and pole




- ④ Take off lower dome and lining




- ⑤ Install the camera to the adaptor and fix with screw




- ⑥ Complete the fixation and install the lining



- ⑦ Adjust the view of angle and install lower dome



- ⑧ Installation complete



### Order Model:

DS-1271ZJ-135

### Parameter:

Model	DS-1271ZJ-135
Parameters	Pendent Mounting Bracket for Dome Camera
Appearance	Hik White
Material	Aluminum Alloy
Dimension	136×565mm
Weight	1350g

### Notice:

- The bracket should be installed on flat wall
- Waterproof rubber is necessary for outdoor application
- The wall must be capable of supporting over 3 times as much as the total weight of the camera and the mount.
- The maximum load capacity of the bracket is 4.5KG

**Note:** The actual dome camera may vary from the picture above.